

Welcome To Wellness

Thank you for buying a **Wellness Shower™**. It delivers the purest and most natural water available, and effectively reduces harmful contaminants, while at the same time enhancing your water with delicate ions and minerals.

Did you know your body can absorb up to 100 times more contamination in a single 10-minute shower than drinking the same water for an entire day? The Wellness Shower protects you by reducing chlorine, chloramines, radon, trihalomethanes, and foreign tastes for 18 to 24 months - two or three times longer than any other shower filtration system on the market.

Ever notice how dry your skin is after you shower and the negative effect it has on your hair? The Wellness Shower utilizes proprietary enhancement media to create the optimal showering experience. The patented magnetic treatment stage introduces a large amount of negative ions into your water, creating an affect similar to showering at the base of a waterfall. Bakuhan®, one of the enhancement media used in all Wellness Filter products, imparts a wide range of trace minerals into the water. These minerals assist in several bodily functions, and for this reason, Bakuhan is the first and only natural stone classified as a medicinal mineral by the Japanese Ministry of Health. These technologies combine to produce a **spa experience in every shower!**

The Wellness Kitchen S-III™ is the perfect compliment to your new Wellness Shower. It combines premium carbon block filtration with our proprietary enhancement technology to produce what many refer to as **The Best Source of Water on Earth®**. You'll love the enhanced flavor in your gourmet cooking. It is for this reason that some of the world's best restaurants use Wellness Filter systems.



The Wellness MG-III™ & MG-IV™

Home Systems offer the ultimate in water purification and enhancement. Imagine having better-than-bottled-quality water flowing from every tap in your home – including the bath, kitchen, and garden. Because the water is treated as it enters your home or business, you will have peace of mind knowing that all of your water is purified and enhanced. Find out for yourself why hundreds of thousands of users including physicians, athletes and health-conscious individuals make Wellness Filter their choice for a lifetime.

IMPORTANT NOTICES

Read this data sheet in conjunction with the specifications and operating instructions herein and compare the capabilities to your actual water treatment needs before installing.

WARNING — For correct operation of The Wellness Shower it is essential to follow these instructions.

CAUTION — Do not use water that is micro biologically unsafe or of unknown quality without adequate disinfection. The Wellness Shower is designed as a shower/bath filter and is not designed as a drinking water filter.

Wellness Shower (WS-SF2) Filter Specifications

Temperatures range: 40°-110° F (5° C - 43° C)

Operating pressure: 20-100 psi (1.38 - 6.89 bar)

Chlorine, chloramines reduction: Up to 99%

Material: Black ABS Plastic

Total rated capacity: 24,000 Gallons (90,850 Liters)

Micron Rating: 50 Microns

Shower Filter: 26 oz. / 9.2" x 3.75" (235mm x 95mm)

Cartridge: 23 oz. / 7.25" x 2.65" (185mm x 70mm)

Media: Wellness Filter® Volcanic Media & KDF-55®

The Wellness Shower must be installed in accordance with all state and local laws and plumbing regulations for water treatment devices.

Note: Should water flow through your Wellness Shower decline over time, the pre-filter screen may be partially clogged with dirt or sediment. To clean the pre-filter, backwash your Wellness Shower.

Limited Warranty

The manufacturer warrants the Wellness Shower to be free from material defects and workmanship under the condition which the Wellness Shower was installed, operated and maintained according to this Usage & Care Guide.

- Wellness Shower body is warranted for one (1) year from the date of purchase. Receipt is required for the warranty.
- Wellness Shower cartridge is warranted for ninety (90) days from purchase date.

A receipt is required for the warranty. The manufacturer will replace or repair (at manufacturer's discretion) any shower filter that fails to perform due to material defects and workmanship. There are no warranties under situations of product misuse, improper installation, improper maintenance and/or misapplication. This warranty does not assume, explicitly or implicitly, any responsibilities or consequential damages caused by product misuse, improper installation, improper maintenance and misapplication of the product.

Wellness Enterprises, LLC

418 SW 140th Terrace Newberry, FL 32669 USA

Tel: 1-352-333-0480 • Fax: 1-352-333-0490

Version 1.1105

For updates see: wellnessfilter.com/support/downloads/

Wellness Shower™

Usage & Care Guide



Quick Start Guide

Wellness Shower Installation

STEP A - Install Showerhead to Shower Housing Base

1. Remove the Wellness Shower and the Massaging Showerhead from the box.
2. Inspect the inside of the silver knurled attachment ring on the Massaging Showerhead to ensure the rubber washer is in place.
3. Attach the Massaging Showerhead to the male threads on the Wellness Shower housing base. Turn the silver knurled attachment ring in a clockwise direction until snug.

STEP B - Install Wellness Shower to Shower Arm

1. Remove the old showerhead from the shower arm.
2. Inspect shower arm at its base for any burring or gaps which may prevent water-tight seal. Repair or replace arm if necessary.
3. A good rule is to wrap Teflon[®] tape around threads on shower arm (where old showerhead was attached) Note: Rubbing a bar of soap perpendicularly across the threads to deposit some soap in the grooves may work as a Teflon tape substitute.
4. Inspect the inside of the silver knurled attachment ring on the Wellness Shower housing base to ensure that the rubber washer is in place. (If misplaced, the rubber washer from the old showerhead may be used).
5. Attach Wellness Shower to the shower arm by turning the silver knurled attachment ring in a clockwise direction. **Warning: Overtightening can damage fittings and this can cause leaks.**



6. Your Wellness Shower is now ready for use. Turn on the water supply and check water flow and seals.

Note: It is normal to see discolored water discharge from the showerhead during the first 5 seconds of use.


Wellness Shower Backwash Operation

Your Wellness Shower's backwash feature extends filter cartridge life and increases water flow. Wellness recommends you backwash your Wellness Shower at least bi-weekly. If your water's sediment levels are high, backwash up to every day for 30 seconds

1. The most efficient way to backwash your Wellness Shower is during the warm-up time — waiting for your water to get hot.
2. Simply rotate the top of the Wellness Shower's cartridge 90 degrees counter-clockwise so the recycle symbol ♻️ is directly above the triangle indicator — you should feel a slight indent as it sets into the backwash position.
3. Leave water on for 60 seconds. Backwash water flows through holes in the filter housing base.
4. After 60 seconds, rotate the top of the Wellness Shower's cartridge 90 degrees clockwise to the showerhead symbol 🚿 for regular operation.



Note: In case severe sediment levels or neglect has caused slow water flow, a power backwash may be necessary. With water running, simply rotate the filter cartridge back and forth between backwash and service settings quickly and repeatedly. Do this until water flow is restored and then for at least one minute longer.

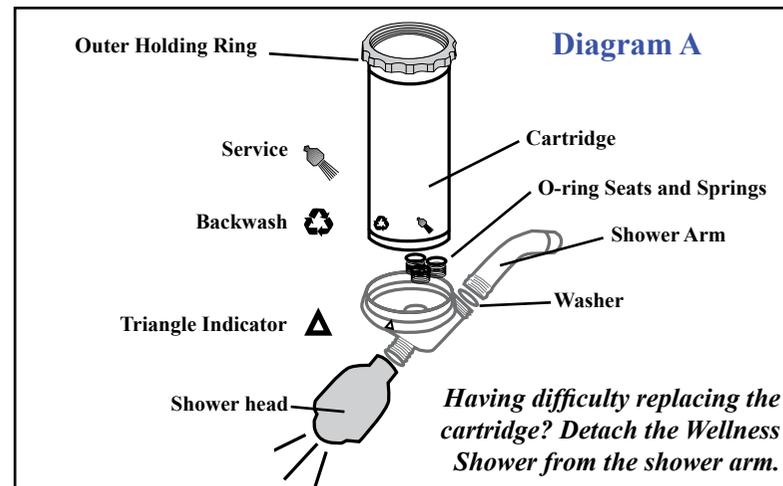


Wellness Shower Cartridge

The cartridge is designed to last 18 to 24 months or approximately 24,000 gallons (91,200 liters) prior to cartridge replacement.

Note: For descriptions, refer to Diagram A on preceding page.

1. Turn off the water flow in the shower.
2. Unscrew the outer holding ring.
3. Remove cartridge (along with the outer holding ring) from the base of the Wellness Shower housing.
4. Check and make sure the three (3) seats and springs (please refer to Diagram A) are properly fitted into their respective locations.
5. Install a brand new replacement filter cartridge into the base of the Wellness Shower unit housing, aligning the triangular indicator in-between the **Service** and **Backwash** positions for proper filter cartridge installation.
6. Screw on the Outer Holding Ring to hold the filter cartridge.
7. With one hand holding the shower base, rotate the filter cartridge until the triangular indicator is aligned at the **Service** position.
8. Turn on the water flow and flush the Wellness Shower for 30 seconds prior to using a new cartridge for the first time.



NOTICE
Water that contains poly phosphates, and/or high sediment levels, may require you backwash your Wellness Shower up to every day.